## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

#### (19) World Intellectual Property Organization International Bureau



# 1 CATA TANIBU A CITUM (CATA ELIM 1401 148 1 C DI 1613 AND 1818 1818 CORP AND COLIN IN 1819 CORP

#### (43) International Publication Date 21 April 2005 (21.04.2005)

#### PCT

### (10) International Publication Number WO 2005/036735 A1

(51) International Patent Classification7: 1/32, 3/217, 1/32, 1/30

H03F 3/217.

(21) International Application Number: PCT/DK2004/000696

- (22) International Filing Date: 11 October 2004 (11.10.2004)
- (25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data: PCT/DK03/00688


10 October 2003 (10.10.2003)

- (71) Applicant (for all designated States except US): TC ELECTRONIC A/S [DK/DK]; Sindalsvej 34, DK-8240
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): PEDERSEN, Kim,

Rishøj [DK/DK]; Skæring Sandager 54, DK-8250 Egå (DK). ARKNÆS-PEDERSEN, Lars [DK/DK]; Bemstorffsvej 13, DK-8260 Viby J (DK).

- (74) Agent: PATENTGRUPPEN APS; Arosgården, Aboulevarden 31, DK-8000 Aarhus C (DK).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,

[Continued on next page]

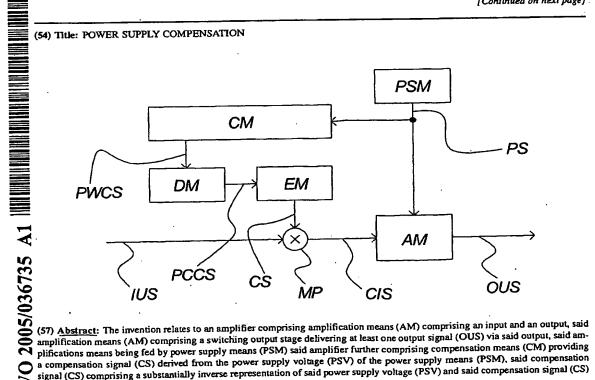

a compensation signal (CS) derived from the power supply voltage (PSV) of the power supply means (PSM), said compensation signal (CS) comprising a substantially inverse representation of said power supply voltage (PSV) and said compensation signal (CS) being fed to said amplification means (AM).